
Recycled Polyester

Water and Stain Repellent Finish



2006-04 ELECTRIC

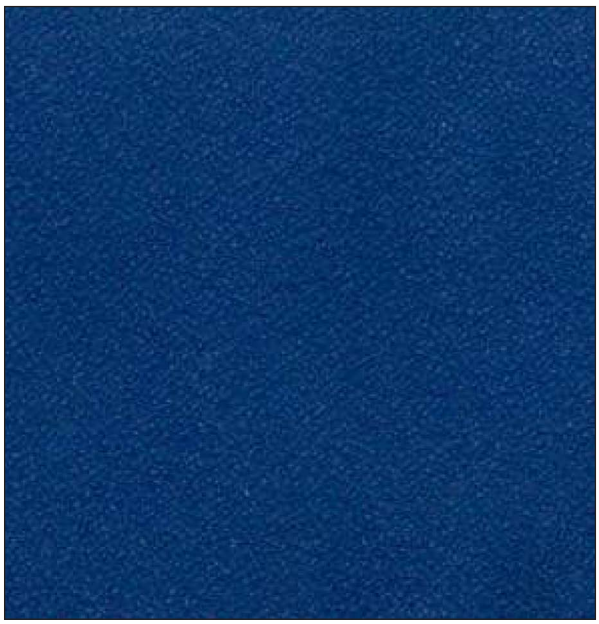

2006-11 BURST



2006-07 SPRITZ



2006-09 DUNE



2006-10 FIREY



2006-12 RUBIO



2006-06 HYDRA



2006-08 SEED



2006-02 SHALE



2006-13 VITAL



2006-05 TIDE



2006-03 EVE



2006-01 MARCO

CORE

Technical Specifications

STYLE	FIBRE CONTENT	WEIGHT	THICKNESS
CORE	50% Recycled Polyster, 50% Polyester	285 g / m	137 cm

Performance Characteristics

TEST	PERFORMANCE
Abrasion Resistance	ASTM D4157-07 Over 200,000 double rubs
Colorfastness to Crocking	Warp: 280N Weft: 352N (ASTM D 5733:1999 Trapezold method)
Colorfastness to Light	AATCC 8-05 Wet: Class 4.5 Dry: Class 4.5
Piling Resistance	AATCC 16-04 Class 4.5 @ 40 hours
Tensile Strength	ASTM D5034-01 Warp : 289.1 lbs / 131.4kgs Fill : 241.9lbs / 109.9kgs
Seam Slippage	ASTM D4034-95 Warp : 69.3 lbs/31.5kgs / Fill: 61.6 lbs/28.0 kgs
Flammability	CAL117-E Class 1

Bristol product distributed
exclusively by Office Design Studio

www.officedesignstudio.com
tel 1.866.9STUDIO (1.866.978.8346)